



City of Auburn, Maine

Engineering Department

60 Court Street | Auburn, Maine 04210

www.auburnmaine.gov | 207.333.6601

February 8, 2021

Dear Bidder:

The City of Auburn is accepting written proposals for the Auburn Public Works Department's **2021 MPI Project- Gracelawn Road**. The City reserves the right to accept or reject any or all proposals in whole or in part and to waive any informality the City may determine necessary. The City also reserves to itself the exclusive right to accept any proposal when it is deemed by the City to be in its best interest. The City of Auburn is governed by Title 1 M.R.S.A. § 401-410, otherwise known as the Freedom of Information Act, which considers bid specifications as public documents. In awarding any proposal, the City may consider, but not be limited to, any of the following factors: Bidder qualifications, price, experience, financial standing with the City, warranties, references, bonding, delivery date, and service of Bidder. Vendors/Contractors shall be current on all amounts due to the City of Auburn prior to the City entering into any contract agreement. All proposals must include FOB to Auburn, Maine unless otherwise specified.

Proposals will not receive consideration unless submitted in accordance with the following instructions to bidders. Please mark sealed envelopes plainly: **"2021 MPI Project- Gracelawn Road-Bid #2021-020."**

Bid packages will be available beginning on Monday, February 8, 2021. Documents can be obtained from the City of Auburn's website: www.auburnmaine.gov/business/bid-notice. Questions regarding this Request for Bids should be directed to Tony Beaulieu P.E, City Engineer, at (207) 333-6601, ext. 1140. **A pre-bid will be held on Tuesday, February 16th, 2021, at 2:00pm via web conference.** Bidders must register via email with the Engineer, at abeaulieu@auburnmaine.gov with the subject line "2021 MPI Project- Gracelawn Road" to be included on the Bidder's list, receive invite to all web conferences and be notified of any addenda.

Please submit your proposal to the City of Auburn by 2:00 p.m. **Thursday, February 25th, 2021.** Proposals must be delivered to **Derek Boulanger, Facilities Manager/Purchasing Agent, 60 Court Street, Auburn, Maine 04210** on or before the date and time appointed. No proposals will be accepted after the time and date listed above. Proposals will be opened at 2:00 p.m. on that date and read aloud via a web conference.

Sincerely,

Derek Boulanger
Facilities Manager/Purchasing Agent

Contents

| | |
|---|----|
| CONDITIONS AND INSTRUCTIONS TO BIDDERS..... | 3 |
| GENERAL CONDITIONS | 4 |
| BID PROPOSAL FORM | 5 |
| BID FORM..... | 6 |
| SCOPE OF WORK..... | 7 |
| SPECIAL PROVISIONS | 8 |
| SECTION 100 - GENERAL PROVISIONS..... | 13 |
| SECTION 202 - REMOVING OF STRUCTURES AND OBSTRUCTIONS | 15 |
| SECTION 203 – COMMON EXCAVATION..... | 16 |
| SECTION 211 - DITCH AND INSLOPE EXCAVATION | 17 |
| SECTION 304 – AGGREGATE BASE COURSE | 18 |
| SECTION 307 - FULL DEPTH RECYCLED PAVEMENT | 19 |
| SECTION 403 - HOT BITUMINOUS PAVEMENT | 20 |
| SECTION 409 - BITUMINOUS TACK COAT | 21 |
| SECTION 603 - PIPE CULVERTS AND STORM DRAINS..... | 22 |
| SECTION 605 – UNDERDRAINS | 24 |
| SECTION 608 – PEDESTRIAN RAMP WITH DETECTABLE WARNING SURFACE | 25 |
| SECTION 609 – CURB..... | 26 |
| SECTION 610 – RIPRAP | 27 |
| SECTION 615 - LOAM..... | 28 |
| SECTION 620 – GEOTEXTILES | 29 |
| SECTION 627 – PAVEMENT MARKINGS | 30 |
| SECTION 643 – TRAFFIC SIGNALS..... | 31 |
| SECTION 652 – MAINTENANCE OF TRAFFIC | 34 |
| SECTION 659 – MOBILIZATION | 35 |
| BID BOND | 36 |
| SAMPLE AGREEMENT | 38 |
| APPENDIX A | 44 |

CONDITIONS AND INSTRUCTIONS TO BIDDERS

1. Bidders shall use the enclosed bid form for quotations. Whenever, in bid forms, an article is defined by using a trade name or catalog number, the term "or approved equal", if not inserted, shall be implied.
2. Submit a separate unit price for each item unless otherwise specified in the bid request. Award will be made on a basis of each item, or as a group, whichever is in the best interest of the City. Prices stated are to be "delivered to destination".
3. Bid proposals must be completed in full, in ink and must be signed by firm official. Bid proposal **must be notarized** prior to bid being sealed and will be disqualified if not notarized. Bids may be withdrawn prior to the time set for the official opening
4. Bids will be opened publicly. Bidders or representatives may be present at bid opening.
5. Awards will be made to the lowest responsible bidder, considering the quality of the materials, date of delivery, cost which meets specification and is in the best interest to the City of Auburn.
6. All transportation charges, including expense for freight, transfer express, mail, etc. shall be prepaid and be at the expense of the vendor unless otherwise specified in the bid.
7. The terms and cash discounts shall be specified. Time, in connection with discount offered, will be computed from date of delivery at destination after final inspection and acceptance or from date of correct invoice, whichever is later.
8. The City is exempt from payment of Federal Excise Taxes on the articles not for resale, Federal Transportation Tax on all shipments and Maine Sales Tax and Use Taxes. Please quote less these taxes. Upon application, exemption certificate will be furnished with the Purchase Order when required.
9. No contract may be assigned without the written consent of the Purchasing Director or his designate. The contract shall not be considered valid until a purchase order has been issued to the successful bidder.
10. Please state "2021 MPI Project- Gracelawn Road – Bid # 2021-020", on submitted, sealed envelope.
11. The City of Auburn reserves the right to waive any formality and technicality in bids whichever is deemed best for the interest of the City of Auburn.

12. All work must be completed from 7:00AM to 7:00PM. The completion date for this project is October 2nd, 2021. Liquidated damages of \$500/calendar day will be assessed on uncompleted work.

GENERAL CONDITIONS

1. Equal Employment Opportunity

The City of Auburn is an Equal Opportunity Employer and shall not discriminate against an applicant for employment, and employee or a citizen because of race, color, sex, marital status, physical and/or mental handicap, religion, age, ancestry or natural origin, unless based upon a bona-fide occupation qualification. Vendors and contractor or their agents doing business with the City shall not violate the above clause or the Civil Rights Acts of 1964. Violations by vendors shall be reviewed on a case-by-case basis and may mean an automatic breach of contract or service to the City of Auburn.

2. Save Harmless

The Bidder agrees to protect and save harmless the owner from all costs, expenses or damages that may arise out of alleged infringement of patents of materials used.

3. Subcontracting

The Bidder shall not subcontract any part of the work or materials or assign any monies due it without first obtaining the written consent of the municipality. Neither party shall assign or transfer its interest in the contract without the written consent of the other party.

4. Warranty

The Bidder warrants that all work will be of good quality and free from faults and defects, and in conformance with the specifications. All work not so conforming to these standards may be considered defective. The Bidder agrees to be responsible for the acts and omissions of all of its employees and all subcontractors, their agents and employees, and all other persons performing any of the work under a contract with the Bidder.

5. Bonds, Retainage and Payments

A bid bond shall be submitted with appropriate bid forms in the amount of 5% of the total contract value. Also, payment and performance bonds will be required from the contractor who is awarded this contract. Retainage in the amount of 10% will be held from each progress payment and shall be released at the discretion of the Assistant City Engineer. Payments shall be made by the City to the Contractor 30 days after receipt of the request for payment.

BID PROPOSAL FORM

Due: Thursday, February 25th, 2021

To: City of Auburn
Derek Boulanger, Facilities Manager/Purchasing Agent
60 Court Street
Auburn, ME 04210

The undersigned individual/firm/business guarantees this price for Thirty days (30) from the bid due date. The undersigned submits this proposal without collusion with any other person, individual, or firm or agency. The undersigned ensures the authority to act on behalf of the corporation, partnership or individual they represent; and has read and agreed to all of the terms, requests, or conditions written herein by the City of Auburn, Maine. By signing this bid form, the firm listed below hereby affirms that its bid meets the minimum specifications and standards as listed above.

Signature _____ Name (print) _____

Title _____ Company _____

Address _____

Telephone No. _____ Fax No. _____

Email Address: _____

STATE OF MAINE
_____, SS.

Date: _____

Personally appeared _____ and acknowledged the foregoing instrument to be his/her free act and deed in his/her capacity and the free act and deed of said company.

Notary Public _____

Print Name _____

Commission Expires _____

BID FORM

| MDOT ITEM | DESCRIPTION | UNIT | QNTY | UNIT COST | TOTAL COST |
|-----------|---|------|--------|-----------|------------|
| 201.23 | Tree Removal | EA | 10 | | |
| 201.24 | Stump Removal | EA | 10 | | |
| 202.20 | Remove Bituminous Concrete Surface | SY | 2,300 | | |
| 202.201 | Sawcut Pavement | LF | 500 | | |
| 202.203 | Pavement Butt Joints | SY | 150 | | |
| 203.20 | Common Excavation | CY | 1,200 | | |
| 203.24 | Common Borrow | CY | 3,800 | | |
| 211.30 | Ditch Excavation | LF | 1,500 | | |
| 304.10 | Aggregate Base Course- Crushed Type D | TON | 1,200 | | |
| 304.14 | Aggregate Base Course- Crushed Type A | TON | 6,200 | | |
| 304.141 | Aggregate Base Course- Crushed Type A (Driveways & Sidewalks) | TON | 2,400 | | |
| 307.32 | Reclaim Existing Roadway | SY | 12,800 | | |
| 403.207 | Hot Mix Asphalt, 19.0mm- Base | TON | 1,900 | | |
| 403.208 | Hot Mix Asphalt, 12.5mm – Surface | TON | 1,400 | | |
| 403.209 | Hot Mix Asphalt, Hand Work | TON | 450 | | |
| 403.213 | Hot Mix Asphalt, 12.5mm – Intermediate | TON | 1,500 | | |
| 409.15 | Bituminous tack coat, applied | GAL | 900 | | |
| 603.159 | 12" Culvert HDPE Pipe | LF | 400 | | |
| 604.16 | Alter Catch Basin to Manhole | EA | 2 | | |
| 604.162 | Alter Existing CB/MH – Core 12" | EA | 6 | | |
| 604.252 | Catch Basin A5-C | EA | 21 | | |
| 605.09 | 6" Underdrain Type B | LF | 1,300 | | |
| 605.11 | 12" Underdrain Type C | LF | 1,900 | | |
| 605.12 | 15" Underdrain Type C | LF | 320 | | |
| 608.26 | Ped Ramp w/ Detectable Warning Surface | SF | 24 | | |
| 609.10 | Slipform Vertical Curb - Concrete | LF | 6,500 | | |
| 609.11 | Vertical Curb Type 1 | LF | 320 | | |
| 609.12 | Vertical Curb Type 1 Circular | LF | 16 | | |
| 609.2381 | Terminal Curb Type 1 Circular – 8' | EA | 2 | | |
| 610.08 | Plain Riprap | TON | 50 | | |
| 615.08 | Loam, Seed & Mulch | SY | 5,500 | | |
| 620.54 | Stabilization/Reinforcement Geotextile | SY | 14,500 | | |
| 627.733 | 4" White Pavement Edge Line | LF | 9,600 | | |
| 627.734 | 2-4" Double Yellow Pavement Center Line | LF | 4,800 | | |
| 627.75 | White Pavement Marking | SF | 500 | | |
| 643.60 | Rectangular Rapid Flashing Beacon | EA | 1 | | |
| 652.39 | Work Zone Traffic Control | LS | 1 | | |
| 659.1 | Mobilization | LS | 1 | | |
| | | | TOTAL | | |

Written total amount is: _____
 Company Name: _____
 Signed by: _____
 Title: _____
 Print Name: _____
 Address: _____
 Tel. # _____ Date: _____
 Addendum Acknowledged:
 # _____ Date _____
 # _____ Date _____

SCOPE OF WORK

The following scope of work is being proposed for the 2021 MPI Project- Gracelawn Road for the City of Auburn. The scope of work is a brief overview of the expected extent of work on each street included in this contract. This is only a proposed scope with associated estimated quantities. Items and extent may be added or deleted as work progresses or to meet the available funding for this work.

Gracelawn Road- Turner Street to Mount Auburn Avenue

- Proposed dimensions: 4,800' x 30'
- Install/Replace proposed cross culverts and underdrains.
- Remove 10 trees and stumps as directed.
- Reclaim existing roadway surface.
- Add geo-grid reinforcement/stabilization textile over reclaim.
- Add approximately 8" of Type A gravel over reclaim section. Add 15" Type D and 3" Type A gravels over box cut sections.
- Pave with 2" of 19.0mm HMA base, 1.5" of 12.5mm HMA intermediate and 1.5" of 12.5mm HMA surface.
- Match driveway aprons with variable depth Type A gravel, 2" 12.5mm HMA base, 1" 9.5mm HMA surface.
- Install concrete slipform and granite curbing.
- Install 5' wide sidewalk with 12" Type A gravel and 2" of 9.5mm HMA.
- Reestablish ditching and inslopes.
- Loam, seed and mulch as directed.
- Install Rectangular Rapid Flashing Beacon
- Stripe double yellow centerline, edge line and miscellaneous pavement markings.

SPECIAL PROVISIONS

The following Supplemental Specifications and Special Provisions shall amend the "Maine, Department of Transportation Standard Specifications, **March 2020 Edition**" including any and all applicable revisions and special provisions. In case of conflicts, these Supplemental Specifications (1) and Special Provisions (2) shall take precedence and shall govern.

(1) Supplemental Specifications - modifications, additions and deletions to the existing Standard Specifications.

(2) Special Provisions - specifications in the contract which are for additional items not covered in the Standard Specifications

F-1 Work Hours

No work shall proceed on this project prior to the hour of 7:00 AM or after 7:00 PM (prevailing time) on any working day unless the City has granted prior approval. The definition of work for this specification shall include starting or moving of equipment, machinery, or materials. Any day worked for four hours or more will be considered a full working day.

F-2 Notification of Residents

Residents shall be notified sufficiently in advance of any construction affecting the driveway and sidewalk to allow adequate time for their removal of personal vehicles. Locations of cuts for drive access affecting individual residents shall be brought to their attention.

F-3 Traffic Signs

All existing traffic signs, which are to be removed during construction, shall be dismantled and the posts removed and shall be stacked in an area approved by the Engineer. Contractor shall protect the signs from damage while in his possession and shall repair, at no additional cost to the City, any damages cause by his operations.

Stop signs are to be maintained at their original locations at all times during the progress work.

Prior to the start of any construction work, the Contractor shall prepare an acceptable inventory of all signs within the project limits which shall be used as a guide for replacement should signs be removed for construction purposes.

This work shall be considered as subsidiary obligation of the contract for which no special payment will be made.

F-4 Protection of Trees

The Contractor shall be responsible for the preservation of all trees on the project, which are not to be removed. Any trees damaged by the Contractor's operations shall be repaired as approved by tree dressing or paint in accordance with the appropriate provisions of Section 201 of Standard Specifications.

F-5 Maintenance and Protection of Traffic

The Contractor shall be responsible for the maintenance and protection of all vehicular and pedestrian traffic at all times during construction and shall erect suitable warning signs, flashing barriers or temporary lighting devices of sufficient size and number to afford protection to the traveling public in accordance with the most recent edition of "Manual on Uniform Traffic Control Devices for Streets Highways" published by the Department of Transportation of the Federal Highway Administration.

The Contractor shall be held responsible for all damage to the work due to any failure of the warning devices to properly protect the work from the traffic, pedestrians or other causes. Traffic control shall be in accordance with the City of Auburn's Traffic Detail Policy effective April 1, 2006.

F-5A Materials

Materials shall meet the requirements specified for the various subsections of the Specifications. Equals shall be approved only prior to the bid opening.

F-6 Survey

The City of Auburn, Department of Public Services will establish, at their discretion, a benchmark location and one construction baseline. The Contractor shall be responsible for maintaining these controls during construction and providing all additional survey required, which shall be done by a competent Engineer or Surveyor.

F-7 Waste Areas

The disposal of waste and surplus material and slash from tree cutting shall be as outlined in Section 203.06 - Waste Areas of the Supplemental Specifications.

F-8 Occupational Safety and Health

The Contractor is hereby advised that all work to be furnished to the City shall be performed with equipment, methods, and use of personnel in conformance with the pertinent Occupational Safety and Health Act requirements of the State of Maine and with the regulations for

construction as specified by the Department of Labor and Occupational Safety and Health Administration (OSHA) as currently amended.

F-9 Pre-Construction Conference

A conference will be held at 60 Court Street, Auburn, Maine within ten (10) days after the awarding of the contract. At this time, the contractor will be required to submit a graphically illustrated schedule and a plan showing project activities. City officials and representatives of the various utility companies involved in the project will be present at this meeting.

It is the purpose of this meeting to inform the various agencies of the proposed work schedule, and to give them the opportunity of discussing any difficulties and of offering suggestions to the Contractor concerning his proposed schedule in order that full cooperation may be reached.

F-10 Schedule of Operations

The above-mentioned schedule of operations in Section F-10 shall consist of a bar chart detailing the activities included in the contract. Although a bar chart is acceptable as a minimum, more complex and detailed schedules (i.e., flow charts, critical paths, etc.) are encouraged and will be accepted by the City. Updates will be required.

F-11 Traffic Officers

Traffic control shall be the responsibility of the Contractor and as directed. Traffic control officers will be employed by the contractor.

F-12 Limitation of Operations

The Contractor shall conduct the work at all times in such a manner and in such sequence as will assure the least interference with traffic. The Contractor shall not open up work to the prejudice or detriment of work already started. The Engineer may require the Contractor to finish a section on which work is in progress before work is started on any additional sections, if finishing such section is essential to public convenience.

Waste and surplus material shall not be stockpiled, but shall be disposed of in areas as designated in Section 203.06, Waste Areas, of the Supplemental Specifications.

F-13 Questions Regarding Plans and Documents

Questions from prospective bidders relative to this Contract shall be submitted no later than five days before bid opening and directed to:

Tony Beaulieu, P.E.
City Engineer
Engineering Division
Tel. 333-6601 ext. 1140

F-14 Record Drawings

The Contractor shall keep daily records of all changes in the work and records of underground infrastructure. Upon completion of the project, the Contractor shall deliver to the Engineer copies of daily records. Final payment will not be made until Engineering receives copies of daily records.

F-15 Waste Material

All waste material shall be removed from the site and the area left clean upon completion of work. Any equipment or structures damaged by the Contractor shall be repaired or replaced at no additional cost to the City.

F-16 Quality Assurance

The Contractor shall be responsible at all times for maintaining top quality assurance during performance of his work.

F-17 Bids

No bids shall be withdrawn within a period of sixty -(60)- days after the opening of the bids.

F-18 Aggregate Base Courses

All gravel products shall meet MDOT specifications and shall also be produced from quarry rock.

F- 19 Pipe Materials

All pipe supplied on this project shall be High Density Polyethylene (HDPE) pipe unless otherwise specified.

F- 20 Tree Top Removal

First refusal of wood from tree top removal shall be given to the abutting property owner.

F – 21 Sawcut Joints

Joints created by sawcutting shall be protected prior to paving. Damaged joints will be cut back at no additional cost to the City.

F- 22 Weekly Quantity Reports

The Contractor shall submit weekly electronic reports of daily quantities by the end of the day the following Monday. These reports shall be emailed to abeaulieu@auburnmaine.gov.

F- 23 Change Orders

Changes in the scope of work will be approved by the City Engineer and adjusted by Change Orders.

**SUPPLEMENTAL SPECIFICATIONS
SECTION 100 - GENERAL PROVISIONS**

1. SCOPE

The work covered by this section includes furnishing all labor, equipment, materials, incidentals, and the performing of all operations in connection with the work encompassed by these contract documents. All work shall be subject to the terms and conditions of the contract documents.

2. STANDARD SPECIFICATIONS

The City of Auburn, Maine has adopted for this project, the "State of Maine, Department of Transportation, Standard Specifications, **March 2020 Edition**", and the Standard Details (January 2002) and the following Supplemental Specifications including all current additions or modifications thereof. In the case of conflict with the following Supplemental Specifications, addenda shall take precedence and shall govern.

Wherever in the Specifications and in this Contract the term "Department", "the Department of Transportation", "MDOT", or any reference to the "State of Maine, Department of Transportation" or its "Engineers" is mentioned, the intent and meaning shall be interpreted to refer to the CITY OF AUBURN, MAINE, or their authorized representative.

SUPPLEMENTAL SPECIFICATIONS
SECTION 201 – CLEARING RIGHT-OF-WAY

The provisions of Section 201 of the Standard Specifications shall apply with the following additions and modifications:

201.01 Description

This work shall consist of the removal of single trees and stumps in the right of way.

201.08 Removing Single Trees and Stumps

Trees located in the right of way and marked on the plan shall be completely removed and disposed of and stump hole backfilled. The area shall be graded to conform to the surrounding terrain. First refusal of wood from tree top removal shall be given to the abutting property owner.

201.10 Basis of payment

Stumps will be paid for at the contract unit price per each which price will be full compensation for removing, hauling, and disposal of material. The accepted quantity of single trees removed will be paid for at the contract unit price each. Payment for trees shall include removal and disposal of the entire tree except stumps.

| Pay Item | | Pay Unit |
|----------|-------------------------------|----------|
| 201.23 | Removing Single Tree Top Only | Each |
| 201.24 | Removing Stump | Each |

SUPPLEMENTAL SPECIFICATIONS
SECTION 202 - REMOVING OF STRUCTURES AND OBSTRUCTIONS

The provisions of Section 202 of the Standard Specifications shall apply with the following additions and modifications:

202.01 Description

This work shall consist of the removal (milling, grinding or planing) of the surface of the bituminous concrete pavement to the depth, width, grade and cross sections as directed by the Engineer. The sawcut item will be used for cutting the match line in driveways and intersections.

202.061 Removing material

The equipment for removing the bituminous surface shall be a power operating planing machine or grinder capable of removing the bituminous concrete pavement to the required depth. The equipment shall be capable of accurately establishing profile grade by referencing from either the existing paving or from an independent grade control and shall have a positive means for removing excess material from the surface and for preventing accidents from flying material in compliance with subsection 107.24, Safety and Accident Prevention, of the Standard Specification.

202.07 Method of measurement

Removing pavement surface will be measured by the square yard of material removed to a maximum depth of 2 inches, or as directed. The sawcut item will be measured by the linear foot.

202.08 Basis of payment

The accepted quantity of removing pavement surface and pavement butt joints will be paid for at the contract unit price per square yard which price will be full compensation for removing, hauling, clean up and stockpiling the material. The accepted quantity of sawcutting will be paid for at the contract unit price per linear foot which price will be full compensation for cutting, cleaning, and protecting joints prior to paving.

| Pay Item | | Pay Unit |
|----------|------------------------------------|-------------|
| 202.20 | Remove Bituminous Concrete Surface | Square Yard |
| 202.201 | Sawcut Pavement | Linear Foot |
| 202.203 | Pavement Butt Joint | Square Yard |

**SUPPLEMENTAL SPECIFICATIONS
SECTION 203 – COMMON EXCAVATION**

The provisions of Section 203 of the Standard Specifications shall apply with the following additions and modifications:

203.01 Description

The common excavation item shall be used for reconstruction of roadway, project limits, and some driveways. This item includes pavement removal and bituminous curbing removal. Common borrow shall be used for reducing steepness of roadside slopes, backside of curbing, and as directed.

203.19 Basis of payment

The accepted quantity of common excavation and common borrow will be paid for at the contract unit price per cubic yard which price will be full compensation for removing and hauling the material.

| Pay Item | | Pay Unit |
|----------|-------------------|------------|
| 203.20 | Common Excavation | Cubic Yard |
| 203.24 | Common Borrow | Cubic Yard |

**SUPPLEMENTAL SPECIFICATIONS
SECTION 211 - DITCH AND INSLOPE EXCAVATION**

The provisions of Section 211 of the Standard Specifications shall apply with the following additions and modifications.

211.01 Description

This work shall consist of removing winter sand build-up and other earth material from existing inslopes and ditches. New ditch areas consist of removing all material encountered including backslopes as needed. ¾" gravel shall be used in shoulder areas, be graded flush with the surface course of pavement and shall be paid under Item 304.14. Lawn areas shall be loam/seeded/mulched, be graded flush with the surface course of pavement and shall be paid under Item 615.08.

211.05 Ditch Excavation

Ditches and adjacent slopes will be graded to the original template from the edge of shoulder to the top of the backslope, or as directed by the Engineer. Any exposed soil **shall** be seeded and mulched **daily**.

211.07 Method of Measurement

The quantity of work done will be measured by the linear foot. Measurements will be made along the ground parallel to the roadway centerline.

211.08 Basis of Payment

Payment will be full compensation for excavating, disposing excess materials, and rehabilitating affected areas with seed and mulch.

| Pay Item | Pay Unit |
|-----------------------------------|-------------|
| 211.30 Ditch Excavation & Inslope | Linear Foot |

**SUPPLEMENTAL SPECIFICATIONS
SECTION 304 – AGGREGATE BASE COURSE**

The provisions of Section 304 of the Standard Specifications shall apply with the following additions and modifications.

304.01 Description

Aggregate Base Course material **shall** be a crushed product sourced from a quarry. This surface shall be graded with 2.5% slopes in a normal crowned cross section unless otherwise directed.

Dust Control. The Contractor shall employ dust control measures to minimize the creation of airborne dust during the construction process. As a minimum, standard dust control techniques shall be employed where heavy equipment and the public will be traveling. These may include techniques such as watering-down the site or spreading hygroscopic salts.

304.07 Basis of Payment

The accepted quantities of base course material will be paid for at the respective contract unit price per ton complete in place.

| Pay Item | | Pay Unit |
|----------|--|----------|
| 304.10 | Aggregate Base Course Type D | Ton |
| 304.14 | Aggregate Base Course Type A | Ton |
| 304.141 | Aggregate Base Course Type A (Driveways) | Ton |

**SUPPLEMENTAL SPECIFICATIONS
SECTION 307 - FULL DEPTH RECYCLED PAVEMENT**

The provisions of Section 307 of the Standard Specifications shall apply with the following additions and modifications.

307.01 Description

This work shall consist of pulverizing a portion of the existing roadway structure into a homogenous mass, placing and compacting this material to the lines, grades, and dimensions established by the Engineer. This surface shall be graded with 2.5% slopes in a normal crowned cross section unless otherwise directed.

307.02 Pulverized Material

Pulverized material shall consist of the existing bituminous pavement and a designated portion of the underlying gravel, pulverized, and blended into a homogenous mass. Pulverized material will be processed to 100% passing a 2-inch square mesh sieve.

307.11 Basis of Payment

The quantity of full depth reclamation will be paid for at the contract unit price per square yard.

| Pay Item | Pay Unit |
|-------------------------------------|-------------|
| 307.32 Full Depth Recycled Pavement | Square Yard |

**SUPPLEMENTAL SPECIFICATIONS
SECTION 403 - HOT BITUMINOUS PAVEMENT**

The provisions of Section 403 of the Standard Specifications shall apply with the following additions and modifications.

403.01 Description

This work shall include machine placing HMA as indicated in the Scope of Work. Materials and their use shall conform to the requirements of all related and applicable sections of this contract. HMA shall be placed and compacted with a minimum of two lifts where the total thickness of pavement to be placed exceeds 2". The **most recently** revised special provision Section 108 using the New England Selling Price shall apply to this contract.

403.05 Basis of payment

The accepted quantities of hot mix asphalt pavement will be paid for at the contract unit price per ton for the mixtures, including hot mix asphalt material complete in place.

| Pay Item | | Pay Unit |
|----------|---------------------------------------|----------|
| 403.207 | Hot Mix Asphalt, 19.0mm Base | Ton |
| 403.208 | Hot Mix Asphalt, 12.5mm Surface | Ton |
| 403.209 | Hot Mix Asphalt - Hand Placed | Ton |
| 403.213 | Hot Mix Asphalt – 12.5mm Intermediate | Ton |

**SUPPLEMENTAL SPECIFICATIONS
SECTION 409 - BITUMINOUS TACK COAT**

The provisions of Section 409 of the Standard Specifications shall apply with the following additions and modifications.

409.07 Application of bituminous material

The rate of application shall be 0.03 gallons per square yard as directed. During application, care shall be taken to assure areas outside of the work area shall not be discolored. Tack coat shall be required between all layers of Hot Mix Asphalt.

409.09 Basis of payment

The accepted quantity of bituminous tack coat will be paid for at the contract unit price per gallon for the designated type of material complete in place.

| Pay Item | Pay Unit |
|--------------------------------------|----------|
| 409.15 Bituminous Tack Coat. Applied | Gallon |

SUPPLEMENTAL SPECIFICATIONS
SECTION 603 - PIPE CULVERTS AND STORM DRAINS

The provisions of Section 603 of the Standard Specifications shall apply with the following additions and modifications.

603.031 General

The Contractor shall furnish the following type of pipe under Option III:
High Density Polyethylene Pipe

Exposed pipe ends shall be armored with stone and shall be paid under Item 610.08 Plain Riprap. Fabric beneath riprap shall be incidental to the culvert items.

603.12 Basis of Payment

The accepted quantities of pipe for culverts will be paid for at the contract unit price per linear foot, for the types and sizes specified, complete in place. Excavation for culverts, including excavation below the pipe, for induced trench and for bedding and backfilling will be considered incidental to the pipe item.

| Pay Item | Pay Unit |
|-------------------------------------|-------------|
| 603.159 12 in HDPE Culvert Pipe | Linear Foot |

**SUPPLEMENTAL SPECIFICATIONS
SECTION 604 – CATCH BASINS**

The provisions of Section 604 of the Standard Specifications shall apply with the following additions and modifications.

604.01 Description

Construct manholes, inlets and catch basins. New catch basins shall be priced for a minimum of three inverts. Additional inverts, if required, shall be paid separately. Existing catch basins and manholes will need coring for connection of proposed underdrains and stormdrains.

Adjust existing manholes (storm drains) to grade.

604.06 Basis of Payment

The accepted quantities of catch basins and manholes will be paid for at the contract unit price complete in place. The accepted quantities of altering existing catch basin and manhole adjustments to grade will be paid for at the contract unit price each. The accepted quantity for coring into existing catch basin and manhole will be paid for at the contract unit price each.

| Pay Item | Pay Unit |
|--|----------|
| 604.16 Alter Catch Basin to Manhole | Each |
| 604.162 Alter Existing CB/MH – Core 12" | Each |
| 604.252 Catch Basin Type A5-C | Each |

**SUPPLEMENTAL SPECIFICATIONS
SECTION 605 – UNDERDRAINS**

The provisions of Section 605 of the Standard Specifications shall apply with the following additions and modifications.

605.01 Description

This work shall consist of installing underdrain using pipe and filter material and pipe outlets in accordance with MaineDOT Standard Specification Subsection 605.04. 6" Underdrain shall be connected to upgradient drainage structures where applicable for future maintenance access.

605.02 Materials

All pipe shall be High Density Polyethylene (HDPE) and equal to or larger than the existing pipe. Pipe backfill shall meet MaineDOT Standard specifications Subsection 703.22 Underdrain Backfill. **6" Underdrain shall be perforated with a soil filter sock.**

605.07 Basis of Payment

The accepted quantity of underdrain will be paid for at the contract unit price per linear foot. This price shall include the **cost of excavation**, all labor, materials, and equipment necessary to install the underdrain. Pipe fittings shall be considered part of the linear footage.

| Pay Item | | Pay Unit |
|----------|----------------------------|-------------|
| 605.09 | 6" HDPE Underdrain Type B | Linear Foot |
| 605.11 | 12" HDPE Underdrain Type C | Linear Foot |
| 605.12 | 15" HDPE Underdrain Type C | Linear Foot |

SUPPLEMENTAL SPECIFICATIONS
SECTION 608 – PEDESTRIAN RAMP WITH DETECTABLE WARNING SURFACE

The provisions of Section 608 of the Standard Specifications shall apply with the following additions and modifications.

608.01 Description

This item shall consist of constructing the concrete portion of the sidewalk ramp at an intersecting street. The bid price shall include all necessary work to install concrete (precast acceptable) and truncated domes. Work shall follow Section 608 of MDOT Standard Details, November 2014 edition and current ADA specifications.

608.05 Method of Measurement

Detectable warning plates will be measured for payment by the square foot of actual plate area, only, not including the surrounding concrete.

608.06 Basis of Payment

The accepted quantities of pedestrian ramp with detectable warning surface will be paid for at the contract unit price per square foot and shall include concrete and cast iron truncated dome.

| Pay Item | Pay Unit |
|--|-------------|
| 608.26 Pedestrian Ramp with Detectable Warning Surface | Square Foot |

**SUPPLEMENTAL SPECIFICATIONS
SECTION 609 – CURB**

The provisions of Section 609 of the Standard Specifications shall apply with the following additions and modifications.

609.01 Description

The Engineer will determine mold type in the field. Placement behind curb of 6" of loam/seed/mulch which will be paid under Item 615.08.

609.10 Basis of Payment

The accepted quantities of curb will be paid for at the contract unit price linear foot complete in place.

| Pay Item | | Pay Unit |
|----------|------------------------------------|-------------|
| 609.10 | Slipform Vertical Curb – Concrete | Linear Foot |
| 609.11 | Vertical Curb Type 1 | Linear Foot |
| 609.12 | Vertical Curb Type 1 Circular | Linear Foot |
| 609.2381 | Terminal Curb Type 1 Circular – 8' | Each |

**SUPPLEMENTAL SPECIFICATIONS
SECTION 610 – RIPRAP**

The provisions of Section 610 of the Standard Specifications shall apply with the following additions and modifications.

610.01 Description

This work shall consist of constructing a protective covering of stone. Riprap shall be between 6" and 12" with 50% being greater than 9". A woven slit geotextile shall be placed under riprap.

610.06 Basis of Payment

The accepted quantity of riprap will be paid for at the contract unit price complete in place.

| Pay Item | Pay Unit |
|---------------------|----------|
| 610.08 Plain Riprap | Ton |

**SUPPLEMENTAL SPECIFICATIONS
SECTION 615 - LOAM**

615.01 – DESCRIPTION

This work shall consist of loaming and seeding areas adjacent to existing lawn areas or as required. Loam and its applications shall conform to the requirements of Section 615 of the Standard Specifications. Loam shall have a finished depth of six (6") inches and shall be screened through a one (1") inch square mesh screen. **Loam areas shall be rolled (compacted) prior to placement of seed and mulch.**

Seeding shall be Method Number 1 and shall conform to the requirements of Section 618 of the Standard Specifications. The Contractor shall be required to continually seed area of loam and seed until a satisfactory growth of grass is established. If so required, all areas to be loamed and seeded shall be mulched with an approved wood cellulose fiber compatible with recommended hydro-seeding practices. This mulch shall be applied simultaneously with the seed and shall be of sufficient quantity to protect the seed and hold moisture in to insure a satisfactory growth of grass.

The specifications for the wood cellulose fiber proposed to be used shall be presented to the Engineer for acceptance at least ten (10) days (working days) prior to the application thereof.

The Contractor shall also be responsible for mowing any and all areas loamed and seeded. The mowings will be required if deemed necessary to insure and maintain a satisfactory growth of grass and shall not exceed two mowings.

615.02 – MATERIALS

After a sample of loam has been submitted to the Engineer, he may require that a sample be submitted to a testing agency to determine its organic content, characteristics, and potential use as loam suited to the site.

615.08 - BASIS OF PAYMENT

The accepted quantity of loam and seed will be paid for at the contract unit price per square yard. This price shall include the cost of excavation and all labor, materials, and equipment necessary to satisfactorily complete the work. All costs for watering, furnishing labor and equipment for mowing will not be paid for separately, but shall be considered as incidental to this pay item.

| Pay Item | Pay Unit |
|---------------------------|-------------|
| 615.08 Loam and Seed | Square Yard |

**SUPPLEMENTAL SPECIFICATIONS
SECTION 620 – GEOTEXTILES**

The provisions of Section 620 of the Standard Specifications shall apply with the following additions and modifications.

620.01 Description

Geo-grid fabric to be used on this project for road stabilization shall be Tensar Geogrid TX140. Approved equals will **not** be allowed. A minimum of one foot (1') overlap will be required over the centerline of the road. The geo-grid fabric shall be placed on the graded and compacted reclaimed section. Care shall be taken to not disturb the fabric layer during gravel placement.

620.10 Basis of payment

Geotextile will be paid for at the contract unit price per square yard.

| Pay Item | Pay Unit |
|--|-------------|
| 620.54 Stabilization/Reinforcement Geotextile | Square Yard |

**SUPPLEMENTAL SPECIFICATIONS
SECTION 627 – PAVEMENT MARKINGS**

The provisions of Section 627 of the Standard Specifications shall apply with the following additions and modifications.

627.01 Description

This item shall consist of furnishing and placing reflectorized pavement lines and markings in accordance with Section 708.03 and Section 712.05.

627.10 Basis of payment

Pavement marking lines will be paid for at the contract unit price per linear foot of double yellow line.

| Pay Item | | Pay Unit |
|----------|---|-------------|
| 627.733 | 4" White Pavement Edge Line | Linear Foot |
| 627.734 | 2-4" Double Yellow Pavement Center Line | Linear Foot |
| 627.75 | White Pavement Markings | Square Foot |

SUPPLEMENTAL SPECIFICATIONS
SECTION 643 – TRAFFIC SIGNALS

The provisions of Section 643 of the Standard Specifications shall apply with the following additions and modifications.

643.01 Description

The Contractor shall furnish and install rectangular rapid flashing beacons including signage assemblies at pedestrian crossing where shown on the plans. Their installation shall be as described in this special provision.

643.021 Materials

Each rectangular rapid flashing beacon (RRFB) assembly shall consist of two rectangular-shaped yellow indications (in both directions), each with an LED-array based light source. Each RRFB indication shall be a minimum of approximately 5 inches wide by approximately 2 inches high.

Each RRFB signage assembly shall be mounted on a 14-foot-long 4-inch I.D. non-tapered Schedule 40 galvanized steel pole with pole cap. Poles shall have a 0.75" minimum thickness galvanized ASTM A36 steel base plate circumferentially welded to the pole shaft. Anchor bolts for attachment of base plates to foundations shall be 0.75" x 17" (minimum) x 3" threaded. Four anchor bolts shall be provided for each support pole.

Where designated on the plans, poles for RRFB signage assemblies shall be installed with breakaway bases. Breakaway devices shall conform to the latest edition of "AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signals" and NCHRP 350. Breakaway devices shall be designed such that anchor bolts will not bend upon vehicle impact. A frangible coupling such as Transpo "Pole-Safe" series, Manitoba safety base with reaction plate, or other approved equal meeting requirements of Section 721 shall be used. Electrical conductors at the pole base shall have a fusible breakaway device that will disconnect all ungrounded conductors simultaneously.

Each support pole shall be installed with a square aluminum pedestal base with grounding lug.

Signs for RRFB signage assemblies shall be sheet aluminum and meet requirements of Section 645 for Type II regulatory, warning and route marker assembly signage. The signage assemblies shall include a W11-2 pedestrian crossing sign, W16-7p diagonal arrow plaque, and R10-25 pedestrian push button signs.

Pedestrian push button assemblies for activating RRFB indications shall be installed on each RRFB support pole, mounted at 42 inches above sidewalk grade and within 10 inches of the edge of sidewalk. Push buttons shall meet Americans with Disabilities Act vibrotactile technical

requirements for accessible pedestrian signals (APS). The pushbutton assembly shall include a raised directional arrow indicating the direction of crossing. Audible locator and percussive crossing tones are required.

643.025 Construction and Operation

The two RRFB indications in an assembly shall be aligned horizontally, with the longer dimension horizontal and with a minimum space between the two indications of approximately seven inches (7"), measured from inside edge of one indication to inside edge of the other indication.

The outside edges of the RRFB indications, including any housing, shall not project beyond the outside edges of the W11-2 sign in the beacon signage assembly.

As a specific exception to 2009 MUTCD Section 4L.01 guidance, the RRFB indications shall be located between the bottom of the W11-2 crossing warning sign and the top of the supplemental W16-7p downward diagonal arrow plaque, rather than 12 inches above or below the sign assembly.

When activated, the two yellow indications in each RRFB shall flash in a rapidly alternating "wig-wag" flashing sequence (left light on, then right light on). The flash rate of each individual yellow indication, as applied over the full on-off sequence of a flashing period of the indication, shall not be between 5 and 30 flashes per second, to avoid frequencies that might cause seizures.

The light intensity of the yellow indications shall meet the minimum specifications of Society of Automotive Engineers (SAE) standard J595 (Directional Flashing Optical Warning Devices for Authorized Emergency, Maintenance, and Service Vehicles) dated March 2014.

The RRFBs, normally dark, shall initiate operation only upon pedestrian push button actuation, and shall cease operation at a predetermined time after the pedestrian actuation. For this project, the duration of operation of the RRFBs following each actuation shall be 25 seconds. All RRFBs associated with a given crosswalk shall, when activated, simultaneously commence operation of their alternating rapid flashing indications and shall cease operation simultaneously. Communication between the devices shall be by spread spectrum wireless. Power source for RRFB's shall be solar.

MUTCD R10-25 pedestrian instruction signage with the legend PUSH BUTTON TO TURN ON WARNING LIGHTS shall be mounted adjacent to or integral with each pedestrian pushbutton.

643.18 Method of Measurement

All rectangular rapid flashing beacon and sign assemblies associated with a single crosswalk shall constitute a single installation. Each installation will be measured for payment by the lump sum in place.

643.19 Basis of Payment

Rectangular Rapid Flashing Beacon will be paid for at the contract lump sum price, which payment will be full compensation for furnishing and installing all materials including, but not limited to, the RRFB LED arrays, flasher, timer, lockable controller cabinet, steel poles with base plate, anchor bolts and pedestal base, breakaway devices, wiring and solar power unit/service, pole risers, pedestrian push button assemblies, crosswalk signage, radio communication devices and all appurtenances and incidentals required for a complete and functioning installation.

| Pay Item | | Pay Unit |
|----------|--|----------|
| 643.60 | Rectangular Rapid Flashing Beacon (Set of 2) | Each |

**SUPPLEMENTAL SPECIFICATIONS
SECTION 652 – MAINTENANCE OF TRAFFIC**

The provisions of Section 652 of the Standard Specifications shall apply with the following additions and modifications.

652.3.6 Traffic Control

The Contractor shall maintain access to all drives during construction. Two-way traffic flow shall be required on all streets during non-working hours.

The Contractor must submit a written Traffic Control Plan before the Preconstruction Meeting to the City Engineer for approval.

652.7 Method of Measurement

This subsection shall be amended by the addition of the following paragraph:

Work Zone Traffic Control shall be measured as a percentage of work completed to date relative to total work estimated.

652.02 Basis of payment

This subsection shall be amended by the addition of the following paragraph:

Preparation of traffic control plans, constructions signage, barrels, cones, barriers, maintenance of traffic control devices, flaggers and other necessary incidentals to maintain traffic in accordance with the specifications and the MUTCD shall be paid for Lump Sum under item 652.39 Work Zone Traffic Control.

| Pay Item | Pay Unit |
|----------------------------------|----------|
| 652.39 Work Zone Traffic Control | Lump Sum |

**SUPPLEMENTAL SPECIFICATIONS
SECTION 659 – MOBILIZATION**

The provisions of Section 659 of the Standard Specifications shall apply with the following additions and modifications.

659.01 Description

This item shall consist of preparatory work and operations including, but not limited to those necessary to the movement of personnel, equipment, supplies and incidentals to the project site; and for all other work and operations which must be performed or costs incurred prior to beginning work on the various items on the project site.

659.02 Basis of payment

Partial payments will be made in accordance with Section 108.2.3 Mobilization of the Standard Specifications.

| Pay Item | Pay Unit |
|---------------------|----------|
| 659.10 Mobilization | Lump Sum |

BID BOND

KNOW ALL BY THESE PRESENTS, that we, the undersigned, _____ as Principal, and _____ as Surety, are hereby held and firmly bound unto _____ as OWNER in the penal sum of _____ for payment of which, well and truly to be made, we hereby jointly and severally bind ourselves, successors and assigns.

Signed, this _____ day of _____, 2021.

The Condition of the above obligation is such that whereas the principal has submitted to _____ a certain BID,

attached hereto and hereby made a part hereof to enter into a contract in writing, for the _____

NOW, THEREFORE,

- (a) If said BID shall be rejected, or
- (b) If said BID shall be accepted and the Principal shall execute and deliver a contract in the Form of Contract attached hereto (properly completed in accordance with said BID) and shall furnish a BOND for his faithful performance of said contract, and for the payment of all persons performing labor or furnishing materials in connection therewith, and shall in all other respects perform the agreement created by the acceptance of said BID,

then this obligation shall be void, otherwise the same shall remain in force and effect; it being expressly understood and agreed that the liability of the Surety for all and all claims hereunder shall, in no event, exceed the penal amount of this obligation as herein stated.

The Surety, for value received, hereby stipulates and agrees that the obligations of said Surety and its BOND shall be in no way impaired or affected by any extension of time within which the OWNER may accept such BID; and said Surety does hereby waive notice of any such extension.

IN WITNESS WHEREOF, the Principal and the Surety have hereunto set their hands and seals, and such of them as are corporations have caused their corporate seals to be hereto affixed and these presents to be signed by their proper officers, the day and year first set forth above.

Principal (L.S)

Surety

By: _____

IMPORTANT - Surety companies executing BONDS must appear on the Treasury Department's most current list (Circular 570 as amended) and be authorized to transact business in the state where the project is located.

SAMPLE AGREEMENT

THIS AGREEMENT is made this ### day of Month Year, by and between the CITY OF AUBURN, a municipal corporation existing under the laws of the State of Maine and located in the County of Androscoggin, State of Maine (hereinafter "CITY"), Company Name, Address, EIN, (hereinafter "CONTRACTOR"),

WITNESSETH:

In consideration of the mutual covenants and conditions contained herein, the CITY and the CONTRACTOR agree as follows:

SPECIFICATIONS:

1. The CONTRACTOR shall furnish all of the material and perform all of the work shown on the drawings and described in the specifications entitled: Bid # XXXXX Bid Title which are attached hereto and made a part hereof, and the CONTRACTOR covenants that it shall do everything required by this Agreement, the Special Provisions of the Agreement, the Invitation to Bid and the Specifications in return for payment as provided herein.

COMPLETION DATE:

2. The work to be performed under this Agreement shall be commenced by Month day, year and fully completed on or before Month day, year.

CONTRACT PRICE:

3. The CITY shall pay the CONTRACTOR for the performance of the Agreement the sum of \$XXX

PERFORMANCE BOND:

4. If required by the City, the CONTRACTOR shall furnish to the CITY at the time of the execution of this Agreement a performance bond and a labor and material payment bond each in the amount of \$Dollar amount or N/A (whichever applies) executed by a surety company satisfactory to the CITY, guaranteeing the performance and payment by the CONTRACTOR. Yes, Required (Initials: __) No, Waived (Initials __)

GUARANTEE:

5. The CONTRACTOR shall guarantee his work against any defects in workmanship and materials for a period of one year from the date of the CITY's written acceptance of the project.

PERMITS AND LICENSES:

6. Permits and licenses necessary for the prosecution of the work shall be secured and paid by the CONTRACTOR.

CITY'S RIGHT TO TERMINATE CONTRACT:

7. If the CONTRACTOR should be adjudged a bankrupt, or if it should make a general assignment for the benefit of creditors, or if a receiver should be appointed on account of its insolvency, or if it should persistently or repeatedly refuse or should fail, except in cases for which extension of time is provided, to supply enough properly skilled workmen or proper materials, or if it should fail to make prompt payment to subcontractors or for material or labor, or persistently disregard laws, and ordinances, or otherwise be guilty of a substantial violation of any provision of the Agreement, then the CITY when sufficient cause exists to justify such action, may, without prejudice to any other right or remedy and after giving the CONTRACTOR, and his surety, seven (7) days written notice, terminate the employment of the CONTRACTOR and take possession of the premises and of all materials, tools and appliances thereon and finish the work by whatever method it may deem expedient. In such case the CONTRACTOR shall not be entitled to receive any further payment until the work is finished. If the unpaid balance of the Agreement price shall exceed the expense of the finishing the work, including compensation for additional architectural, managerial and administrative services, such excess shall be paid to the CONTRACTOR. If such expense shall exceed such unpaid balance, the CONTRACTOR shall pay the difference to the CITY.

CONTRACTOR'S LIABILITY INSURANCE:

8. The CONTRACTOR shall not commence work under this Agreement until he has obtained all insurance required under this paragraph and such insurance has been approved by the CITY, nor shall the CONTRACTOR allow any subcontractor to commence work on his subcontract until all similar insurance required of subcontractor has been so obtained and approved. It is a requirement that the CITY be named as an Additional Insured on the General Liability and Automobile Liability policies.

Commercial General Liability to include products and completed operations, and blanket contractual. The limits of liability shall be as follows:

| | |
|---|-------------|
| Bodily Injury and Property Damage | \$1,000,000 |
| Personal Injury and Advertising Injury | \$1,000,000 |
| Per Project Aggregate | \$1,000,000 |
| General Aggregate | \$2,000,000 |
| Products and Completed Operations Aggregate | \$2,000,000 |
| Medical Payments | \$10,000 |

(b) Business Automobile Liability

The CONTRACTOR shall maintain and cause all sub-contractors and lower tier contractors to maintain business automobile liability insurance covering all owned non-owned, leased, rented or hired automobiles (symbol 1). The limits of liability shall be as follows:

| | |
|-----------------------------------|-------------|
| Bodily Injury and Property Damage | \$1,000,000 |
|-----------------------------------|-------------|

Automobile physical damage coverage shall be at the option of the CONTRACTOR, all sub-contractors and lower tier contractors. The CITY shall not be liable for physical loss or damage to any owned, non-owned, leased, rented or hired automobile.

Workers' Compensation Insurance

The CONTRACTOR shall maintain and cause all sub-contractors and lower tier contractor's to maintain Workers' Compensation and Employers Liability in accordance with the laws and regulations of the State of Maine. The limits of liability provided shall be as follows:

| | |
|-------------|-------------------------------|
| Coverage A: | Statutory |
| Coverage B: | \$100,000/\$500,000/\$100,000 |

Professional Liability

If the CONTRACTOR is an Architect, Engineer or Surveyor, they shall maintain a policy of insurance to pay on their behalf whatever amounts that may become legally required to pay on account of an error, omission or negligent act.

Limits of Liability shall be as follows:

\$1,000,000 per occurrence and in the aggregate site specific.

It is a requirement that this policy be maintained for a period of three (3) years following completion of the project.

Certificates of Insurance of the types and in the amounts required shall be delivered to the CITY prior to the commencement of any work by the CONTRACTOR, subcontractor or lower tier contractor or any person or entity working at the direction or under control of the CONTRACTOR. The CONTRACTOR shall assume the obligation and responsibility to confirm insurance coverage for all sub-contractors or lower tier contractors who will participate in the project.

The Certificate of Insurance and the policies of insurance shall include a sixty (60) day notice to the CITY of cancellation, non-renewal or material change in coverage or form.

The CONTRACTOR and his surety shall indemnify and save harmless the CITY, his officers and employees from all suits, actions or claims of any character brought because of any injuries or damage received or sustained by any person, persons or property on account of the operations of the said CONTRACTOR; or on account of or in consequence of any neglect in safeguarding the work; or through use of unacceptable materials in construction of the work; or because of any act or omission, neglect, or misconduct of said CONTRACTOR; or because of any claims or amounts recovered from any infringements or patent trademark, or copyright; or from any claims or amounts arising or recovered under the "Workmen's Compensation Act" or of any other law, ordinance, order or decree; and so much of the money due to the said CONTRACTOR under and by virtue of his/her contract as shall be considered necessary by the CITY for such purpose, may be retained; or in case no money is due, his surety may be held until such suit or suits, action or actions, claim or claims, for injuries or damages as aforesaid shall have been settled and suitable evidence to that effect furnished to the CITY.

Waiver of Subrogation

Payment of any claim or suit including any expenses incurred in connection therewith by the CITY, or any insurance company on behalf of the CITY shall not constitute a waiver of subrogation against the CONTRACTOR, sub-contractors or any lower tier contractor in the event that such claim or suit was caused by or contributed to as a result of the negligent acts of the CONTRACTOR, any sub-contractors or lower tier contractors.

Construction Agreement

The CONTRACTOR shall and does hereby agree to indemnify, save harmless and defend the CITY from the payment of any sum or sums of money to any person whomsoever on account of claims or suits growing out of injuries to persons, including death, or damages to property, caused by the CONTRACTOR, his employees, agents or sub-contractors or in any way attributable to the performance and execution of the work herein contracted for, including (but without limiting the generality of the foregoing), all claims for service, labor performed, materials furnished, provisions and suppliers, injuries to persons or damage to property, liens, garnishments, attachments, claims, suits, costs, attorney's fees, costs of investigation and defense. It is the intention of this paragraph to hold the CONTRACTOR responsible for the payment of any and all claims, suits, or liens, of any nature character in any way attributable to or asserted against the CITY, or the CITY and the CONTRACTOR, which the City may be required to pay. In the event the liability of the CONTRACTOR shall arise by reason of the sole negligence of the CITY and/or the sole negligence of the CITY's agents, servants or employees, then and only then, the CONTRACTOR shall not be liable under the provisions of this paragraph.

DAMAGES:

9. The CONTRACTOR shall defend, indemnify and save harmless the CITY and all persons acting for or in behalf of it against all claims for injuries (including death), loss or damage, arising out of the performance out this contract.

LIENS:

10. Neither the final payment nor any part of the retained percentage shall become due until the CONTRACTOR, if required, shall deliver to the CITY a complete release of all liens arising out of the Agreement, or receipts in full in lieu thereof and, if required in either case, an affidavit that so far as it has knowledge or information the releases and receipts include all the labor and material for which a lien could be filed; but the CONTRACTOR may, if any SUB-CONTRACTOR refuses to furnish a release or receipt in full, furnish a bond satisfactory to the CITY to indemnify it against any lien. If any lien remains unsatisfied after all payment are made, the CONTRACTOR shall refund to the CITY all moneys that the latter may be compelled to pay in discharging such a lien, including all costs and a reasonable attorney's fee.

ASSIGNMENT:

11. Neither party to the Agreement shall assign the Agreement or sublet it as a whole without the written consent of the other, nor shall the CONTRACTOR assign any moneys due or to become due to it hereunder, without the previous written consent of the CITY.

SUBCONTRACTS:

12. The CONTRACTOR shall not sublet any part of this Agreement without the written permission of the CITY. The CONTRACTOR agrees that it is as fully responsible to the CITY for the acts and omissions of its SUB-CONTRACTORS and of persons either directly or indirectly employed by them, as it is for the acts and omissions of persons directly employed by it.

USE OF PREMISES:

13. The CONTRACTOR shall confine its apparatus, the storage of materials and operations of its workers to limits indicated by law, ordinance and permits and shall not otherwise unreasonably encumber the premises with its materials. If any part of the project is completed and ready for use, the CITY may, by written and mutual consent, without prejudice to any of its rights or the rights of the CONTRACTOR, enter in and make use of such completed parts of the project. Such use or occupancy shall in no case be construed as an acceptance of any work or materials.

CLEANING UP:

14. The CONTRACTOR shall at all times keep the premises free from accumulation of waste materials or rubbish caused by its employees or work, and at the completion of the work it shall remove all its rubbish from and about the project, and all its tools, scaffolding and surplus materials and shall leave its work "broom-clean" or its equivalent, unless more exactly specified. In case of dispute, the CITY may remove the rubbish and charge the cost to the CONTRACTOR.

PAYMENTS:

15. Unless otherwise agreed to, the CITY shall make payments on account of the Agreement as follows:

Within 30 days, as invoices are submitted for work completed to the satisfaction of the CITY.

IN WITNESS WHEREOF, the parties hereto have executed this Agreement on the day and year first above written.

BY: _____
Witness


BY: _____
Finance Director

BY: _____
Witness

BY: _____
Contractor

APPENDIX A

CONCEPTUAL PLANS

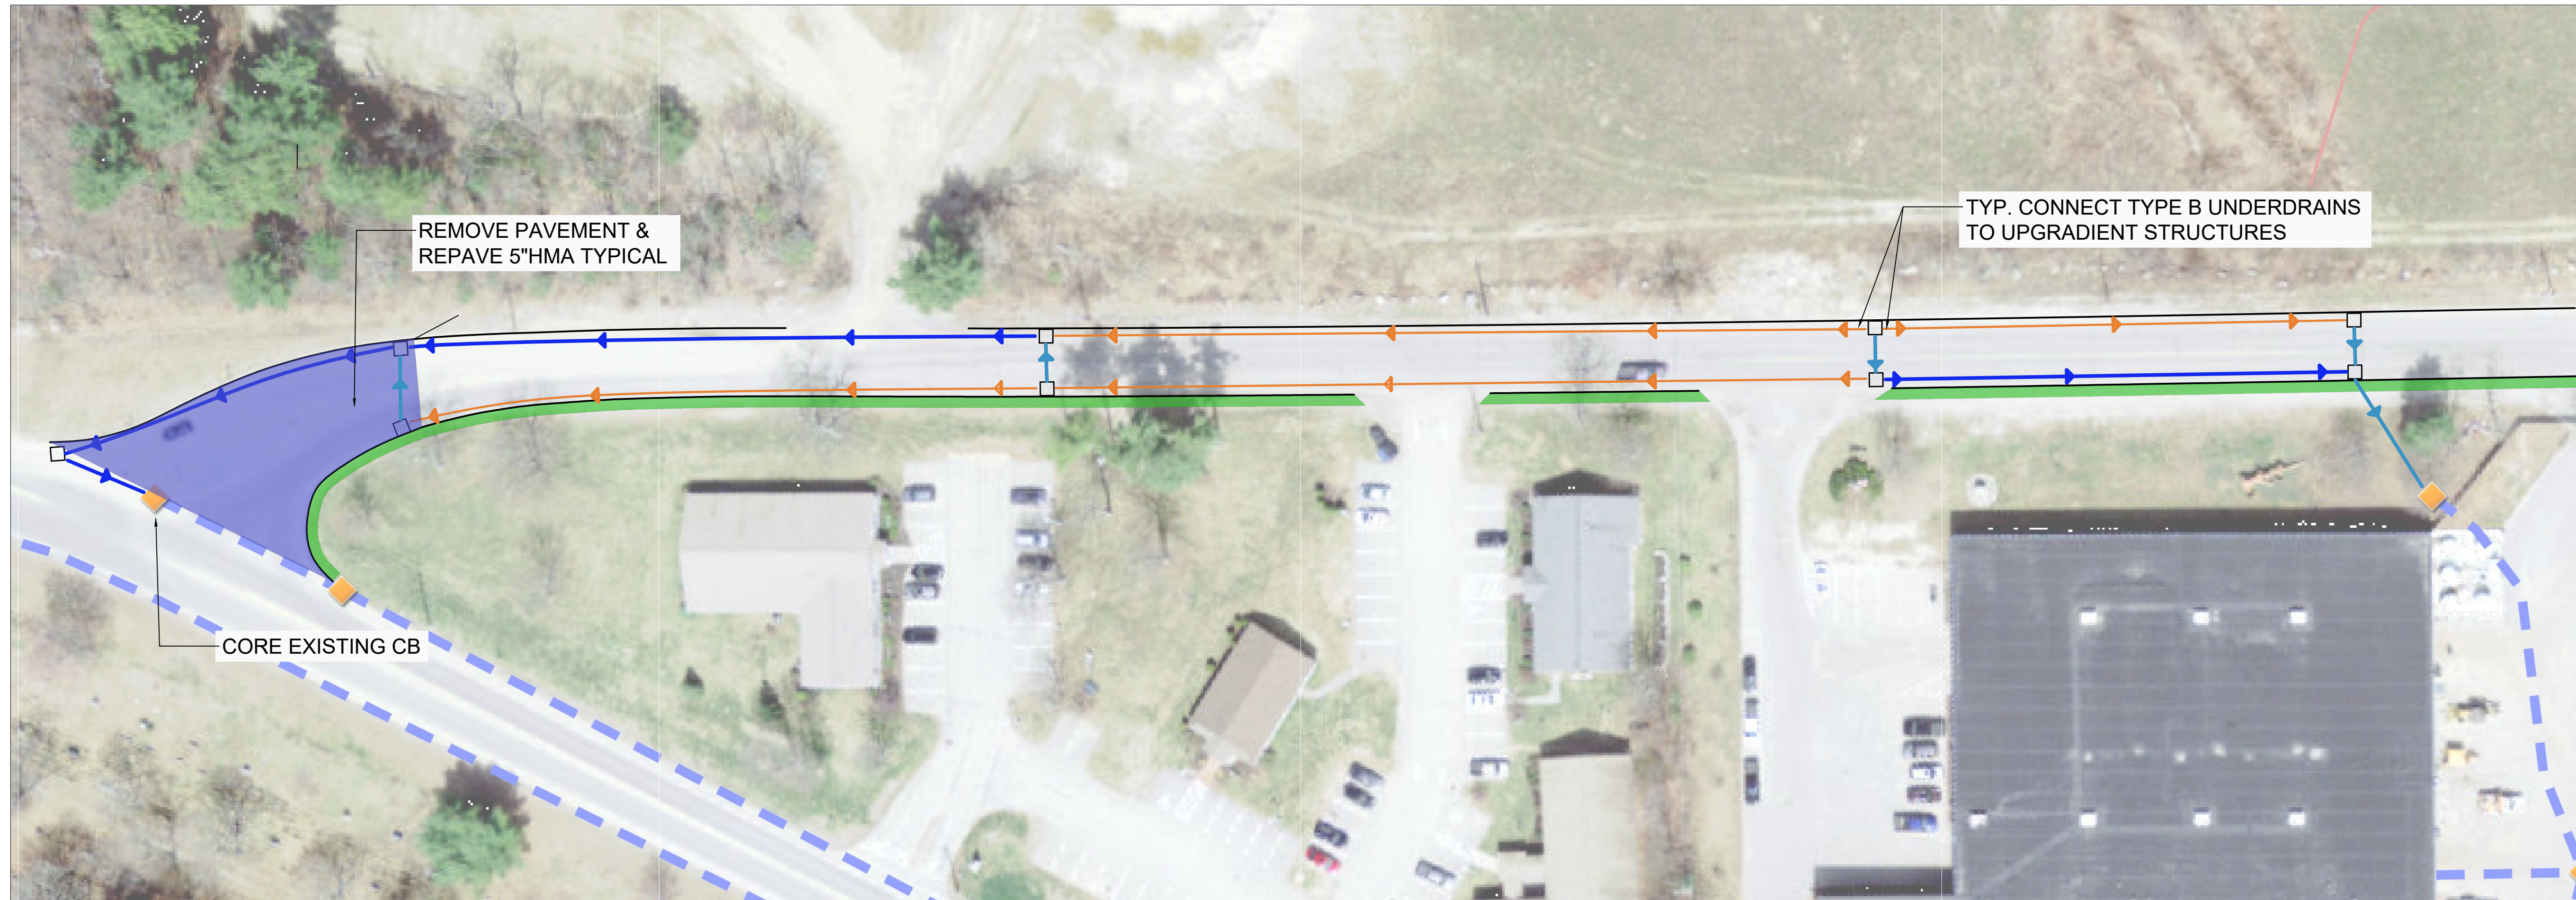

TYP. CONNECT TYPE B UNDERDRAINS TO UPGRADIENT STRUCTURES

REMOVE PAVEMENT & REPAVE 5" HMA TYPICAL

CORE EXISTING CB

General Notes

1. DRIVEWAY APRON BUILDUP:
 12" - TYPE A GRAVEL
 2" - 12.5mm BASE COURSE
 1" - 9.5mm SURFACE
2. SIDEWALK BUILDUP
 12" - TYPE A GRAVEL
 1" - 9.5mm BASE COURSE
 1" - 9.5mm SURFACE
3. ROADWAY BOX CUT BUILDUP
 15" - TYPE D GRAVEL
 3" - TYPE A GRAVEL
 2" - 19mm HMA BASE
 1.5" - 12.5mm HMA INTERMEDIATE
 1.5" - 12.5mm HMA SURFACE
4. ROADWAY RECLAIM BUILDUP
 1 - GEOGRID
 8" - TYPE A GRAVEL
 2" - 19mm HMA BASE
 1.5" - 12.5mm HMA INTERMEDIATE
 1.5" - 12.5mm HMA SURFACE
5. NEW SIDEWALK TO BE BUILD ABUTTING CURB AND COMMON BORROW USED TO MATCH GRADE.

LEGEND


- BOX CUT
- OVERLAY
- REPAVE
- ALTER DMH
- CORE DMH
- PROPOSED CB
- CONCRETE CURB
- GRANITE CURB
- SIDEWALK
- 6" TYPE B UD
- 12" TYPE C UD
- 15" TYPE C UD
- 12" HDPE SD

| No. | Revision/Issue | Date |
|-----|----------------|------|
| | | |

Firm Name and Address

Project Name and Address
 2021 MPI PROJECT
 GRACELAWN ROAD
 AUBURN, ME 04210

| | |
|-----------------------------|--------------|
| Project 2021 MPI PROJECT | Sheet C01 |
| Date 02/08/2021 | |
| Scale 1" = 40' | |

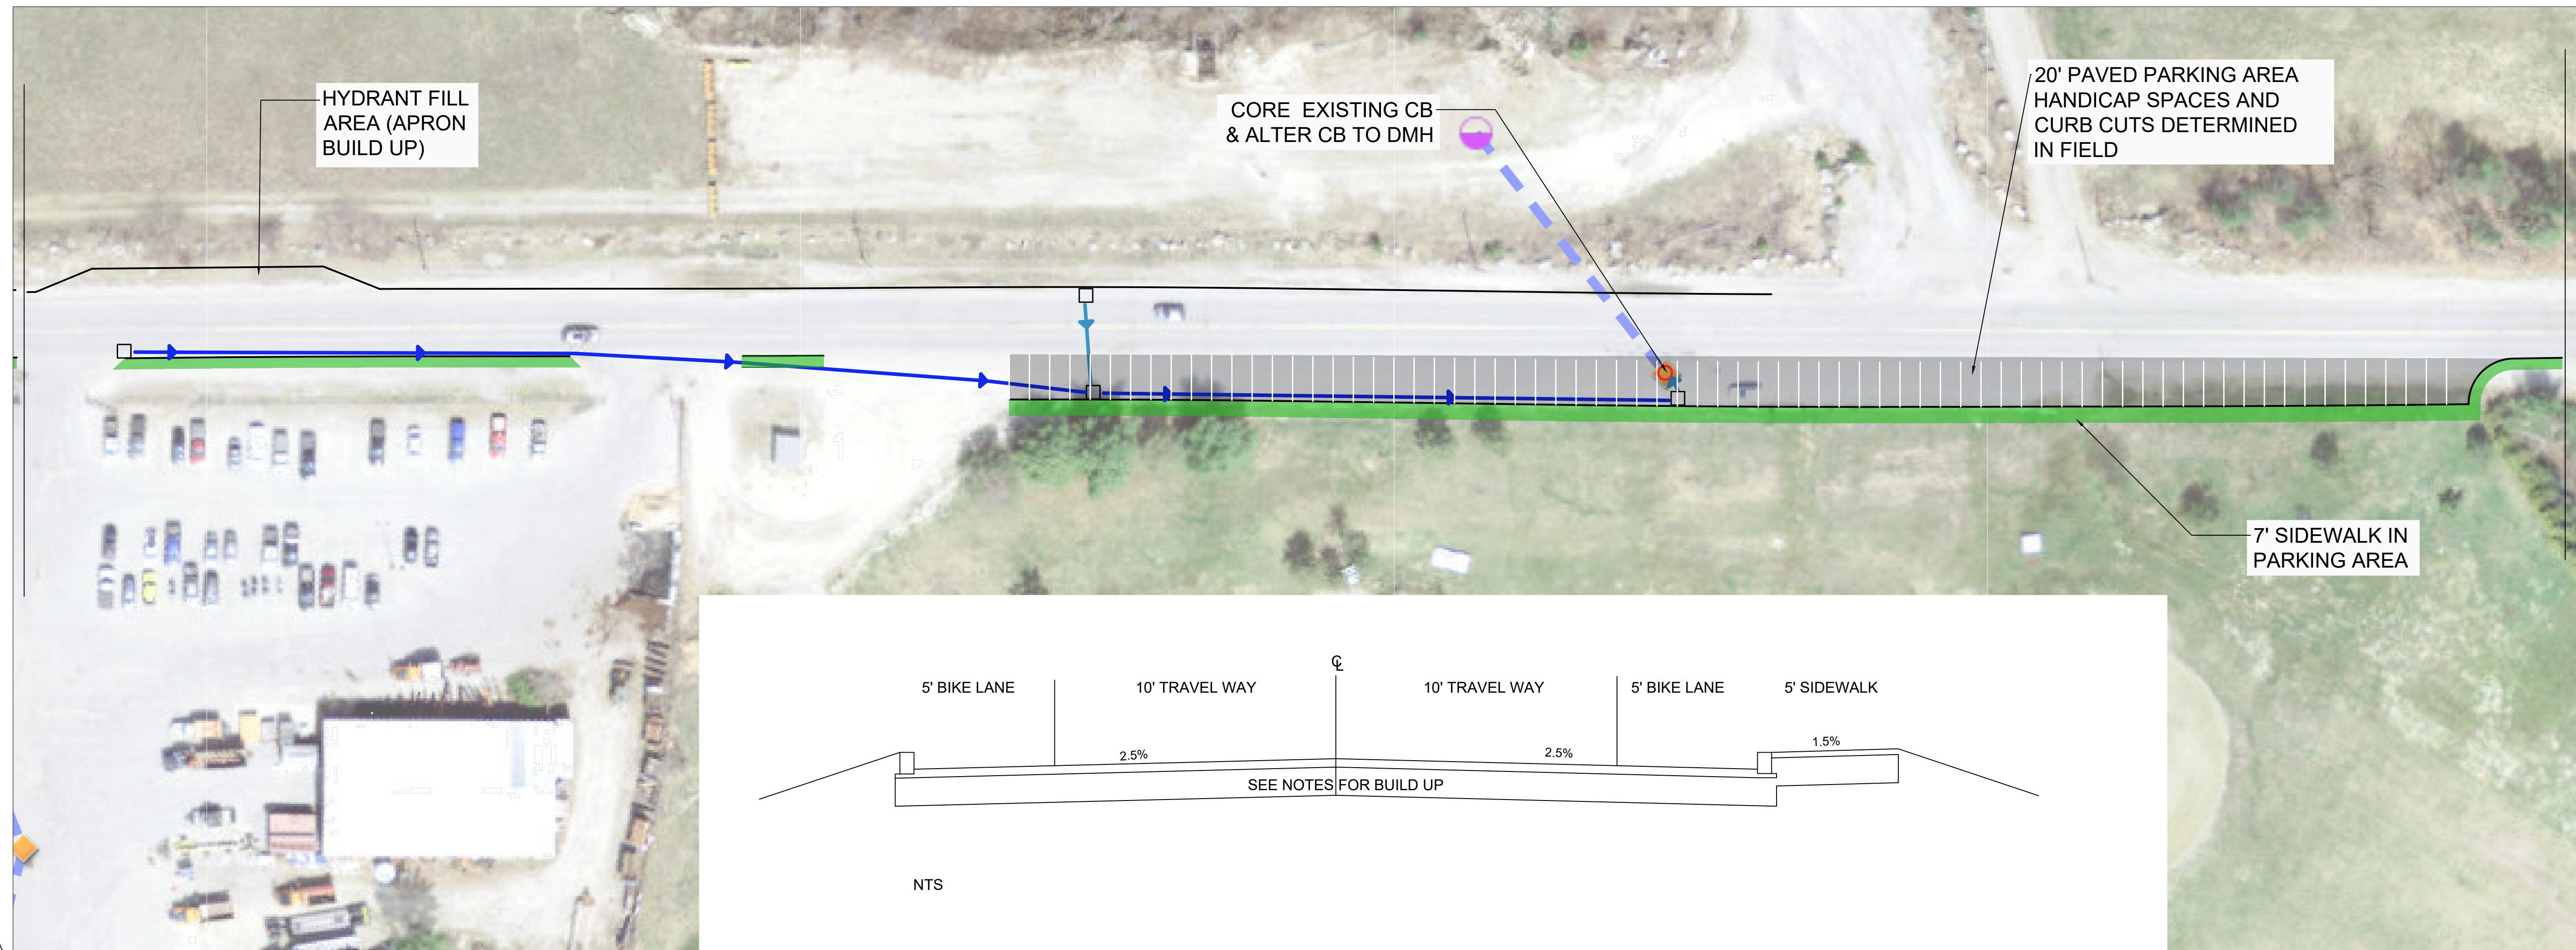


HYDRANT FILL AREA (APRON BUILD UP)

CORE EXISTING CB & ALTER CB TO DMH

20' PAVED PARKING AREA HANDICAP SPACES AND CURB CUTS DETERMINED IN FIELD

7' SIDEWALK IN PARKING AREA

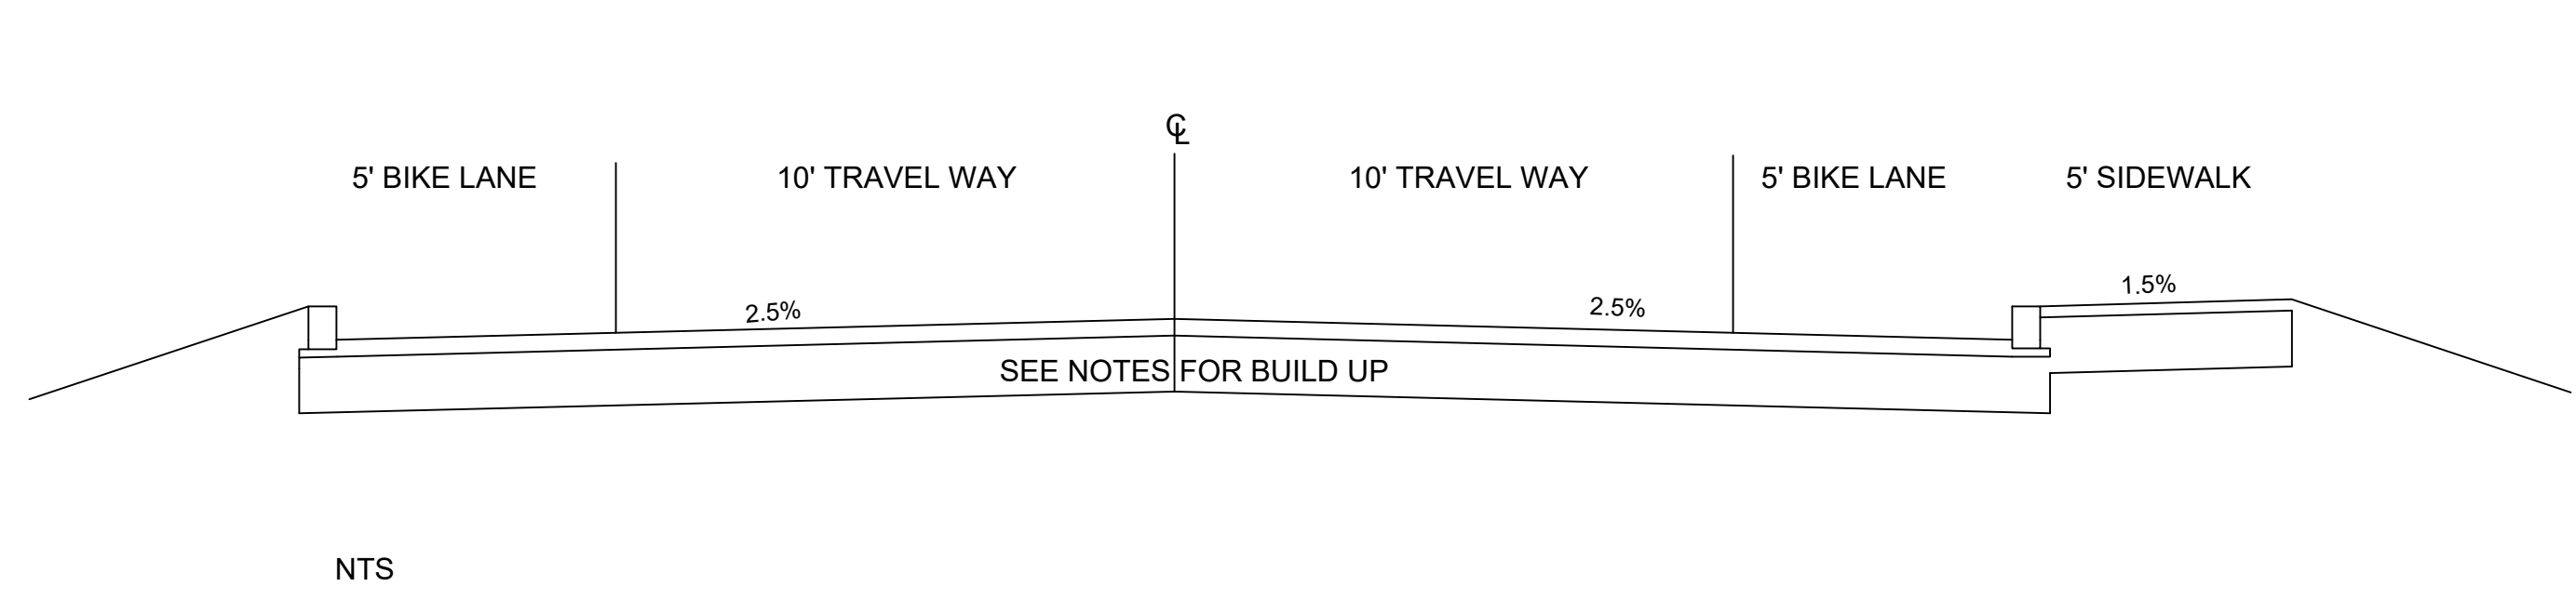

NTS



General Notes

1. DRIVEWAY APRON BUILDUP:
 12" - TYPE A GRAVEL
 2" - 12.5mm BASE COURSE
 1" - 9.5mm SURFACE
2. SIDEWALK BUILDUP
 12" - TYPE A GRAVEL
 1" - 9.5mm BASE COURSE
 1" - 9.5mm SURFACE
3. ROADWAY BOX CUT BUILDUP
 15" - TYPE D GRAVEL
 3" - TYPE A GRAVEL
 2" - 19mm HMA BASE
 1.5" - 12.5mm HMA INTERMEDIATE
 1.5" - 12.5mm HMA SURFACE
4. ROADWAY RECLAIM BUILDUP
 1 - GEOGRID
 8" - TYPE A GRAVEL
 2" - 19mm HMA BASE
 1.5" - 12.5mm HMA INTERMEDIATE
 1.5" - 12.5mm HMA SURFACE
5. NEW SIDEWALK TO BE BUILD ABUTTING CURB AND COMMON BORROW USED TO MATCH GRADE.

LEGEND

| | | |
|---------------|-------|--------------|
| BOX CUT | | Grey |
| OVERLAY | | Orange |
| REPAVE | | Blue |
| ALTER DMH | | Red Circle |
| CORE DMH | | Green Circle |
| PROPOSED CB | | White Square |
| CONCRETE CURB | | Black Line |
| GRANITE CURB | | Grey Line |
| SIDEWALK | | Green Line |
| 6" TYPE B UD | | Orange Line |
| 12" TYPE C UD | | Blue Line |
| 15" TYPE C UD | | Green Line |
| 12" HDPE SD | | Blue Line |

| No. | Revision/Issue | Date |
|-----|----------------|------|
| | | |

Firm Name and Address

Project Name and Address
 2021 MPI PROJECT
 GRACELAWN ROAD
 AUBURN, ME 04210

| | |
|-----------------------------|--------------|
| Project 2021 MPI PROJECT | Sheet C02 |
| Date 02/08/2021 | |
| Scale 1" = 40' | |