

ADDENDUM NO. 1
TO
CITY OF AUBURN, MAINE
2014 MPI PROJECT
December 26, 2013

This addendum amends and /or supplements the bid documents as indicated below. Only these items alter the Bid Documents. Any verbal discussions or responses are hereby declared null and void. Please acknowledge this addendum on page 6 of 31 of the Bid Documents.

Clarifications to the Bid Documents:

The following changes have been made to the Bid Documents:

1. The bid opening date has been changed to Thursday, January 9th, 2014 at 2:00pm. Bids will be publicly opened in Room 206, Auburn City Hall, at that date and time.
2. Item 605.11- 12” Underdrain Pipe, Type C, has been added to the bid form which is attached to this addendum. Also note that the quantity for Item 603.15- 12” Culvert HDPE Pipe has changed. A standard detail for Type B & C underdrains is also attached to this addendum.
3. Item 605.09- 6” Underdrain Pipe, Type B shall either have a filter sock or the granular material (underdrain sand) be wrapped with filter fabric.

BID FORM- Addendum #1

MDOT ITEM	DESCRIPTION	UNIT	QNTY	UNIT COST	TOTAL COST
202.203	Pavement Butt Joints	SY	500		
203.20	Common Excavation	CY	1,400		
211.30	Ditch Excavation	LF	13,800		
304.09	Aggregate Base Course- Crushed Type "A"	TON	8,750		
307.32	Reclaim Existing Roadway	SY	19,500		
403.207	Hot Mix Asphalt, 19.0mm	TON	2,700		
403.208	Hot Mix Asphalt, 12.5mm	TON	1,700		
403.209	Hot Mix Asphalt, Hand Paved Aprons	TON	500		
409.15	Bituminous tack coat, applied	GAL	1,100		
603.15	12 in Culvert HDPE Pipe	LF	150		
603.16	15 in Culvert HDPE Pipe	LF	60		
603.17	18 in Culvert HDPE Pipe	LF	80		
603.19	24 in Culvert HDPE Pipe	LF	120		
603.239	48 in Culvert HDPE Pipe	LF	240		
604.262	4' Diameter Catch Basin	EA	5		
605.09	6" Underdrain Pipe, Type B	LF	1,800		
605.11	12" Underdrain Pipe, Type C	LF	1,650		
608.17	Rehab Existing Driveway	SY	1,000		
609.11	Vertical Curb Type 1- Straight	LF	5,000		
609.237	Terminal Curb Type 1- 7'	EA	70		
610.08	Plain Riprap	TON	150		
615.08	Loam and Seed	SY	7,800		
620.70	Tensar Geogrid TX 140	SY	8,000		
659.10	Mobilization	LS	1		
	Total				

Written total amount is: _____

Company Name: _____

Signed by: _____



Title: _____

Print Name: _____

Address: _____

Tel. # _____ Fax # _____

Date: _____

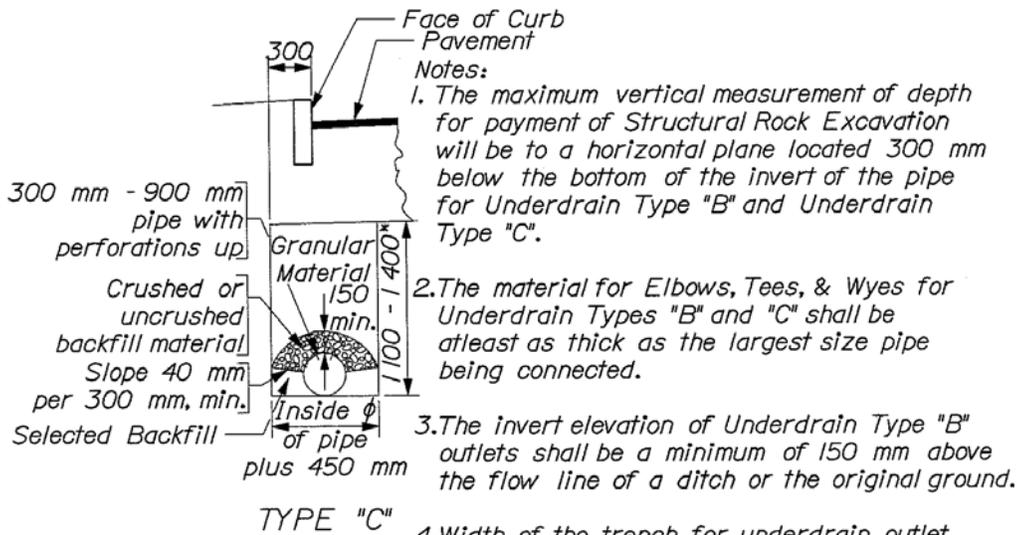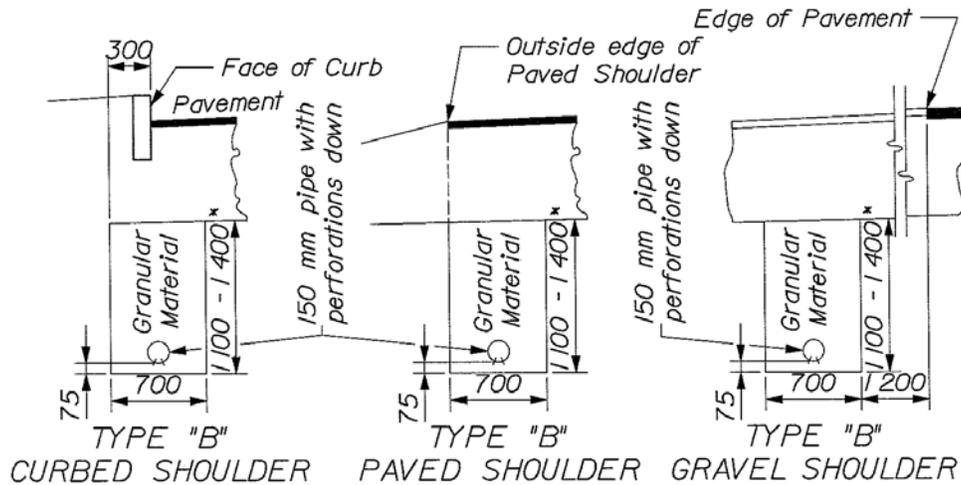

- Notes:
1. The maximum vertical measurement of depth for payment of Structural Rock Excavation will be to a horizontal plane located 300 mm below the bottom of the invert of the pipe for Underdrain Type "B" and Underdrain Type "C".
 2. The material for Elbows, Tees, & Wyes for Underdrain Types "B" and "C" shall be at least as thick as the largest size pipe being connected.
 3. The invert elevation of Underdrain Type "B" outlets shall be a minimum of 150 mm above the flow line of a ditch or the original ground.
 4. Width of the trench for underdrain outlet will be the same as the underdrain trench.
 5. No allowance for payment will be made for excavating or material excavated beyond the horizontal dimensions shown for Types "B" or "C" Underdrain.
 6. In "Box Sections" the edge of the trench shall be in line with the edge of box section.

* Unless otherwise shown on the plans

UNDERDRAIN
605(01)

