


Sec. 60.549 TRADITIONAL DOWNTOWN NEIGHBORHOOD T-4.2

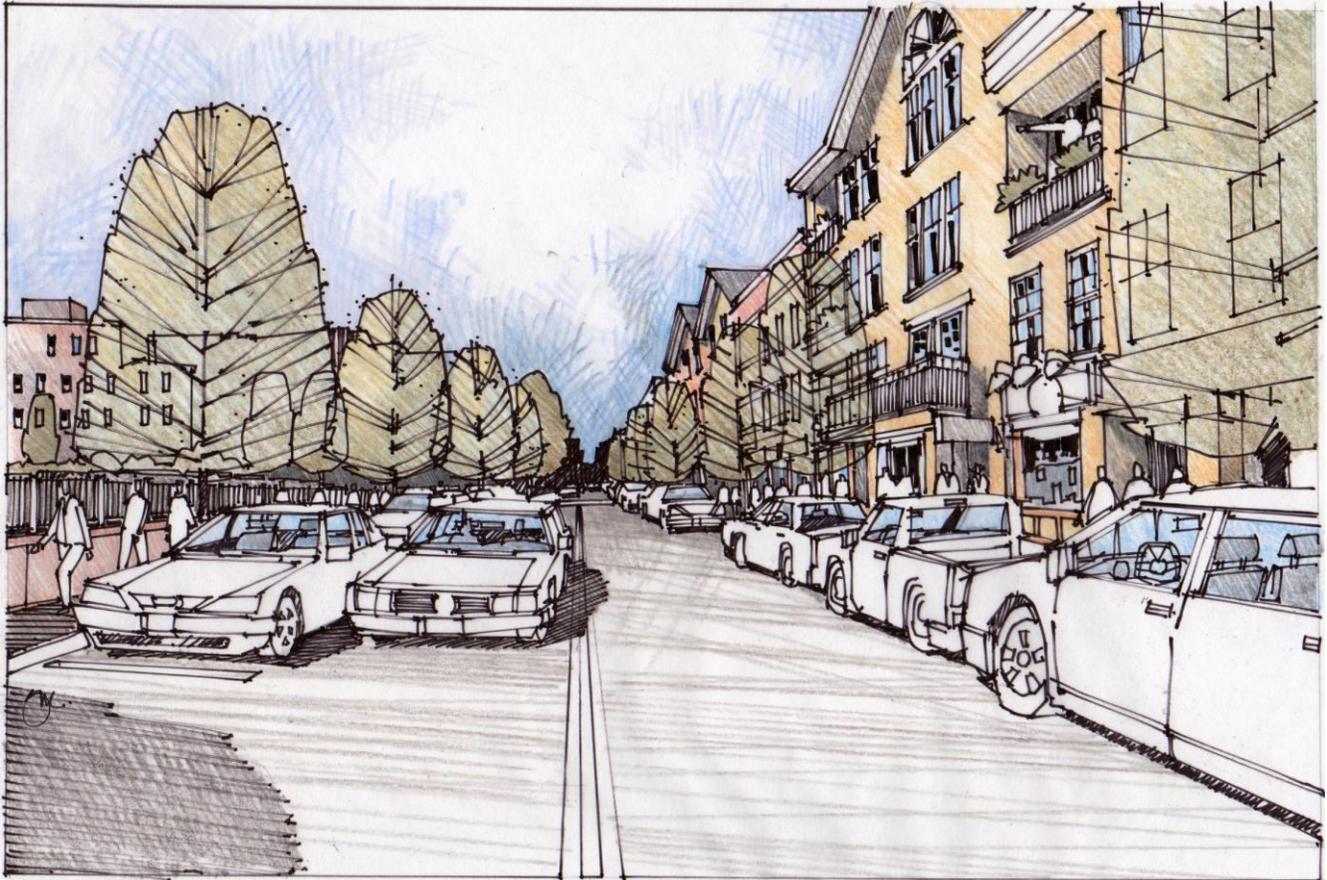

Illustrative View of T- 4.2 (Spring Street)

Intent and Purpose:

Traditional Downtown Neighborhood (T- 4.2)

The Traditional Downtown Neighborhood zone is characterized by a pattern ranging from small to medium sized buildings in a more connective and compact urban environment, and placed to engage in more direct contact between the Public Realm of the street and sidewalk, and the Private Realm of front porches, front stoops and traditional neighborhood-scaled storefronts. The minimum and maximum lot widths, building widths and frontage build-out percentage form a more moderate density and more concentrated street-wall pattern, sustaining increased architectural and social variety, diversity and sidewalk pedestrian vibrancy.



Sec. 60.549 TRADITIONAL DOWNTOWN NEIGHBORHOOD T- 4.2



Characteristic Features

- More public and private realm interaction
- Front facade detailing
- Small front yards
- Bay windows
- Neighborhood scaled storefronts with large windows
- Frontage Fences
- Street Trees
- Moderate densities

Sec. 60-549.1 BUILDING PLACEMENT & CONFIGURATION T-4.2

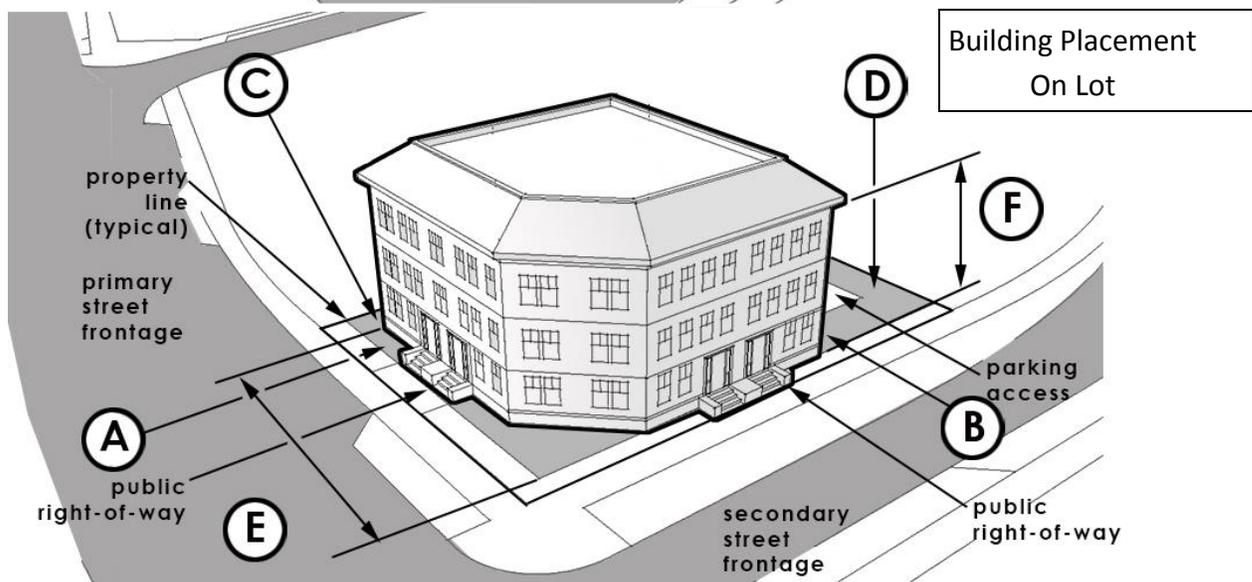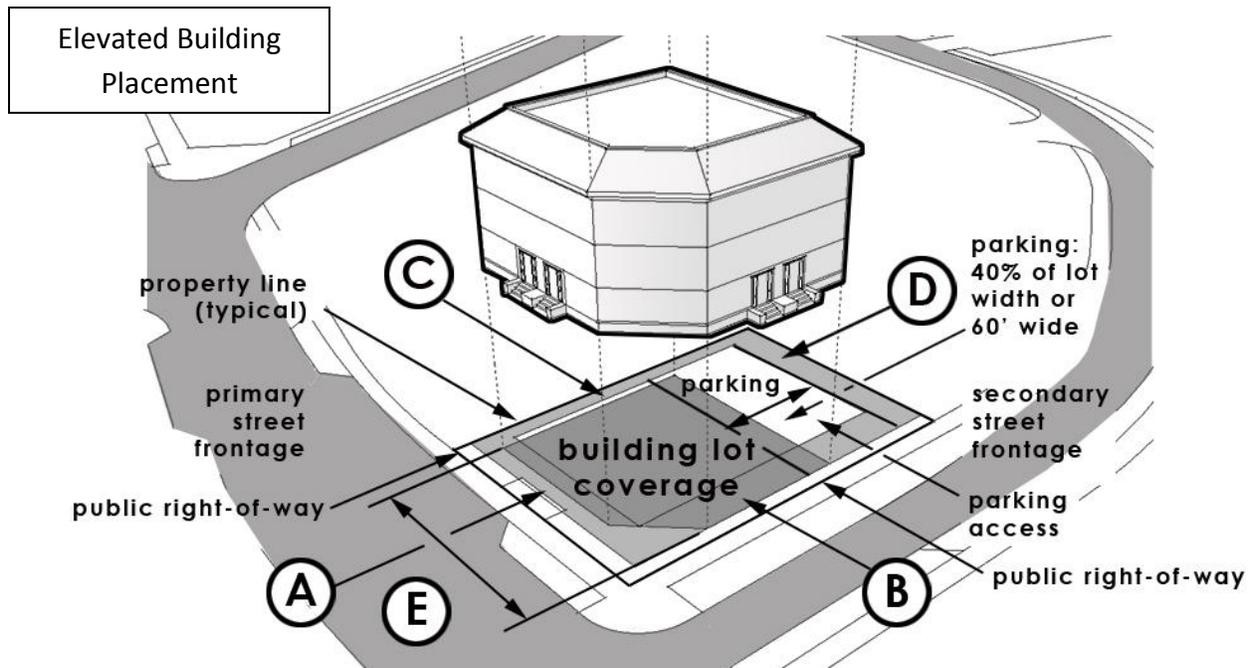


PRINCIPAL BUILDING PLACEMENT:

Front Setback, Principal:	5 ft Min, 15 ft Max	(A)
(Corner Lot) Front Setback, Secondary:	5 ft Min, 15 ft Max	(B)
Side Setback:	5 ft Min	(C)
Rear Setback:	10 ft Min	(D)
Building Lot Coverage:	70% Max	
Useable Open Space:	10% Min	
Frontage Build-Out:	60% Min (along Front Setback, Primary)	
Lot Width:	24 ft Min, 120 ft Max	

PRINCIPAL BUILDING CONFIGURATION:

Building Width:	14 ft Min, 110 ft Max	(E)
Building Height Minimum:	1 Story Min	(F)
Building Height Maximum:	3 Story Max	(F) (excluding attic story)

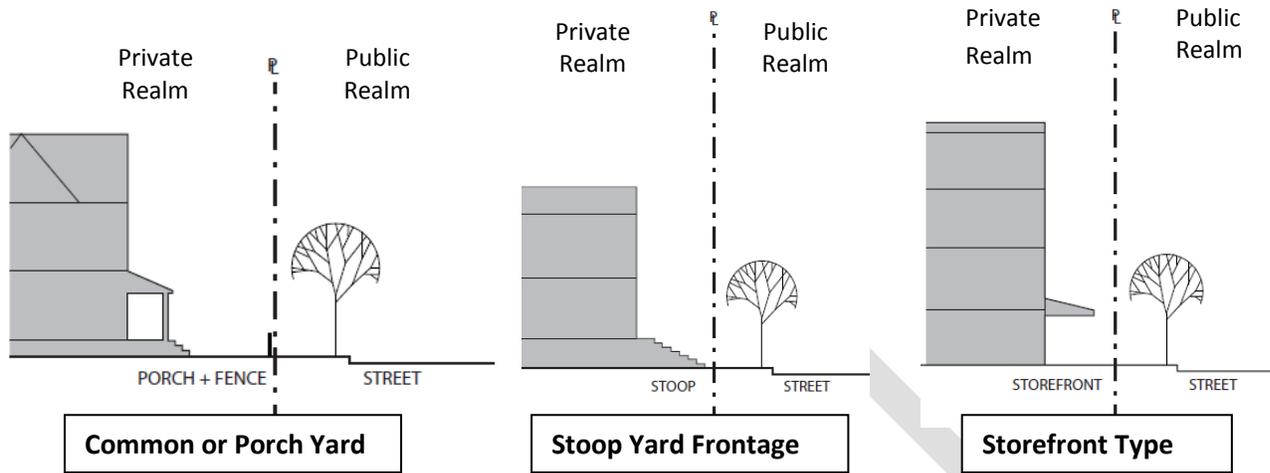

BUILDING FRONTAGE TYPES:	Common Yard; Porch Yard, Stoop and Storefront
BUILDING ENTRIES:	Primary entry door is encouraged along ground story facade facing a primary street.
BUILDING ENVELOPE ARTICULATION:	
Ground Story Building Frontage Facade:	<u>Residential</u> - Windows and doors shall comprise a minimum of 25% and maximum 60% coverage of the total ground story frontage facade. <u>Commercial</u> - Windows and doors shall comprise a minimum of 40% and maximum of 90% coverage of the total ground story frontage facade.
Upper Story Building Frontage Facade:	Windows and doors shall comprise a minimum of 20% and maximum 40% coverage of the total upper story building frontage facade.
Ground Story Finished Floor Elevation:	<u>Residential</u> - The ground story elevation must be a minimum of 2 feet minimum and 6 feet maximum above the front yard elevation (average grade). <u>Commercial</u> - The ground story elevation must be at a minimum of sidewalk grade to maximum of 2 feet.
Frontage Facade Wall:	Blank lengths of wall exceeding 10 linear feet are prohibited.

Front Yard Fence:	<u>Residential</u> - A front yard fence a minimum of 2 feet and a maximum of 4 feet in height is encouraged to maintain spatial edge of street. No chain link, vinyl, split rail, or barbed wire is allowed
Front Yard Fence/Wall Opening:	A vehicle entry way, as part of a front fence/wall, shall be a maximum width of 20 feet; a pedestrian entry way shall be a maximum width of 6 feet.
Building Projections:	No part of any building, except overhanging eaves, awnings, balconies, bay windows, stoops and other architectural features shall encroach beyond the minimum front setback line.
Porch & Stoop Encroachments:	Porches & Stoops may encroach upon the minimum front setback line by the following distances: Front Setback, Principal Frontage 5 ft maximum. Front Setback, Secondary Frontage 5 ft maximum.
Garages:	Detached garages shall be located a minimum of 20 feet from any street right of way.
Driveways:	Driveways are encouraged to be on the secondary street frontage. Driveways shall be paved and a minimum of 8 feet wide and a maximum of 20 feet wide.
Parking:	<u>Residential</u> -Vehicle parking areas shall be located only on driveways or designated parking areas and shall not extend into the street right of way or sidewalk. <u>Commercial</u> - Parking shall be located to rear of the property to the greatest extent possible. Parking on a side yard is limited to no more than 60 feet wide or 40% of the lot width. Screening and/or street wall is required for parking areas along a street.
Accessory Structures:	Accessory structures shall be located a minimum of 20 feet from any street right of way and 5 feet from either side or rear property line.
Landscaping:	Landscaping is encouraged but shall not extend into any street right of way or sidewalk. Street trees are encouraged.
Foundation Planting:	Foundation plantings are encouraged but should be pruned and maintained with enough clearance from the building facade to encourage air circulation.